

# BLDPN30001 - Brushless DC Driver



## FEATURES

- **Maximum Current Limit Setting from 10.0-30.0 Amps (Peak)**
- **Internal or External Potentiometer Speed Control**
- **0V to 5V External Voltage Speed Control**
- **2-Quadrant Operation**
- **Hall Sensor Feedback**
- **Constant Velocity Mode**
- **Short Circuit Protection**
- **Requires 90 - 265 VAC Input Power**
- **Run/Stop, Freewheel and Direction Inputs**
- **TTL-CMOS Compatible Inputs**
- **Detachable, Screw Type Terminal Blocks**
- **RoHS Compliant**




## DESCRIPTION

The BLDPN30001 driver is designed to drive DC brushless motors at currents of up to 30A (peak) and 50V. Using hall sensor feedback, a constant velocity mode can be selected. The driver is protected against over current (cycle-by-cycle or latched), hall sensor error and under voltage. When an error occurs, a fault light and a fault output are turned on to notify the user. Included on the driver is an internal potentiometer to control the maximum phase current allowed into the motor and an internal potentiometer to control the speed of the motor. An external voltage (0-5VDC) can be used to control the speed as well. The direction of the motor can be preset by the direction control input. Pther inputs to the drive include a run/stop and motor freewheel input. When using the run/stop input, there are three ramp up profiles from standstill to select from. The run/stop input overrides all other inputs into the driver.

### Ideal Applications

Automated machinery or processes that involve food, cosmetic, or medical packaging, labeling, or tamper-evident requirements, cut-to-length applications, electronic assembly, robotics, factory automation, special filming and projection effects, medical diagnostics, inspection and security devices, conveyor and material handling systems, metal fabrication (CNC machinery), pump flow control, XY and rotary tables, equipment upgrades or wherever precise positioning or speed control is required.

## DIMENSIONS

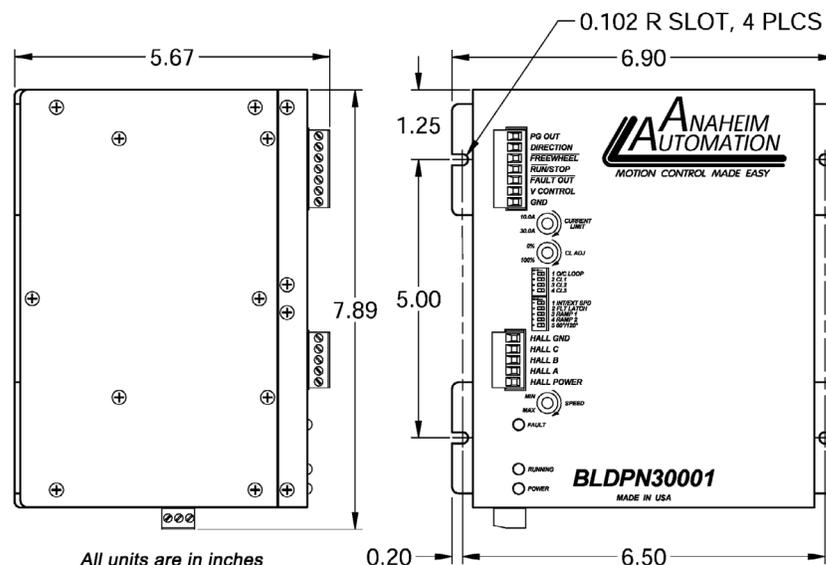

L011554

Control Inputs: (TB3, Pins 2-4)	TTL-CMOS compatible Logic "0" = 0 - 0.8VDC Logic "1" = Open
Direction Control: (TB3, Pin 2)	Logic "1" (open) - Clockwise Logic "0" - Counterclockwise
Freewheel: (TB3, Pin 3)	Logic "1" (open) - Motor is Enabled Logic "0" - Motor is de-energized and coast
Run/Stop: (TB3, Pin 4)	Logic "1" (open) - Motor will not run and if running will decelerate according to ramp dip switch setting Logic "0" - Motor will run and will accelerate to ramp dip switch setting
V Control: (TB3, Pin 6)	To control the speed of the motor with an external DC voltage, INT/EXT SPD switch (SW1-POS1) must be switched to the ON position. 0VDC (min) - 5VDC (max)
Control Outputs: (TB3, Pin 1)	TTL-CMOS Compatible These outputs are able to sink 50mA.
Speed Output: (TB3, Pin 1)	A 5V signal pulse out is available at a rate of 4 pulses for 1 revolution of an 8-pole motor, 3 pulses for 1 revolution of a 6-pole motor, and 2 pulses for 1 revolution of a 4-pole motor. 8-pole motor RPM = 15 * PG OUT in Hz 6-pole motor RPM = 20 * PG OUT in Hz 4-pole motor RPM = 30 * PG OUT in Hz
Fault Output: (TB3, Pin 5)	Logic "1" (5V Out) - Status good, normal operation. Logic "0" - One of the three fault conditions listed in the 'Fault Protect' section has occurred. When a fault is detected, the Fault Output (P in 5) goes low.

