


BRK-12H-80-024-xxx Motor Friction Brake



FEATURES

- **Perfect for Holding Applications**
- **Handles High Torque**
- **Compact Size**
- **Operates On Low Voltage**

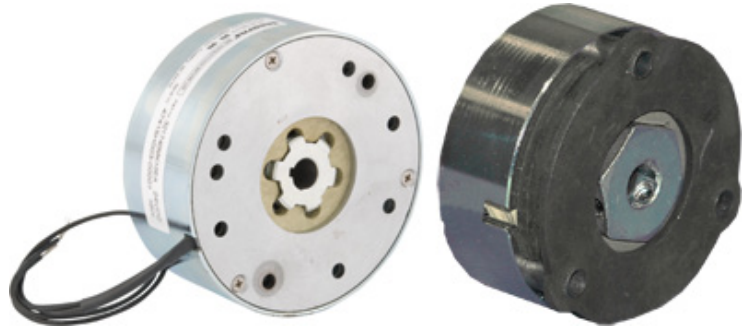

DESCRIPTION

Perfect for holding applications, these friction brakes can handle high torque with a compact size. The low voltage design will operate on applications susceptible to weak battery, brown out or long wiring runs. When the electric power is applied, the armature is pulled by the electromagnetic force in the magnet body assembly, which overcomes the spring action. This allows the friction disc to rotate freely. When electrical power is interrupted, the electromagnetic force is removed and the pressure spring mechanically forces the armature plate to clamp the friction disc between itself and the pressure plate. This develops torque to hold the load.

Note: Manual Release options are available. Contact Sales for more information.



SPECIFICATIONS

Model #	Fits NEMA Size	Bore Size (in)	Nominal-Torque (oz-in)	Nominal Torque (in-lb)	Electric Power (Watts)	Current (mA)	Voltage (V)	Diameter (in)	Width (in)	Weight (lbs)
BRK-12H-80-024-197	15, 17, 23	0.197	80	5	9	375	24	1.77	1.080	0.38
BRK-12H-80-024-250	15, 17, 23	0.250	80	5	9	375	24	1.77	1.080	0.38
BRK-12H-80-024-250-IP54	15, 17, 23	0.250	80	5	9	375	24	1.875	1.080	0.40

*Brakes may be purchased as adders assembled to Anaheim Automation motors. Please contact us for assistance.

L010461

Brake (12H)

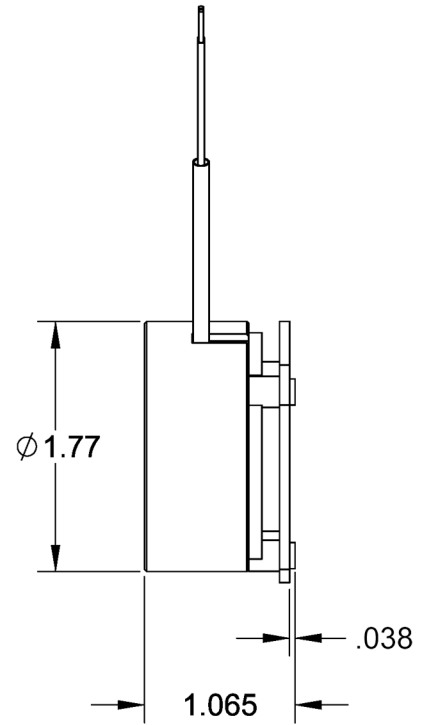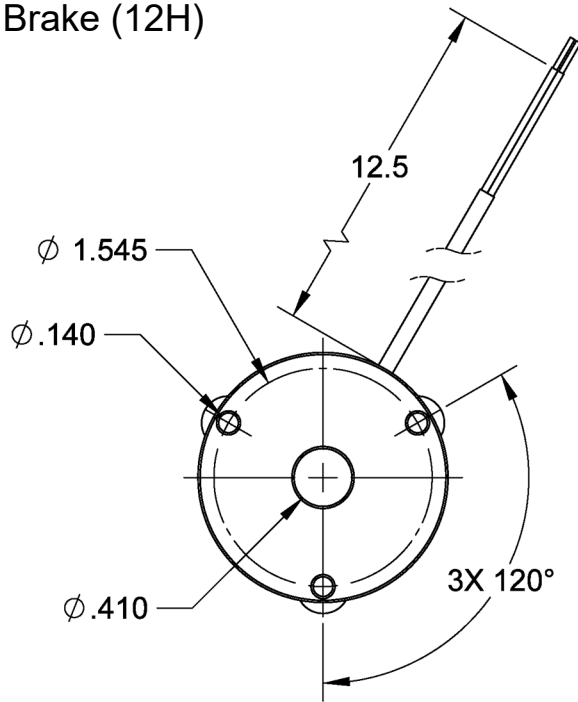

All units are in inches

Bore Size	Keyway Size	
	Width	Depth
0.1875	N/A	N/A
0.2500	N/A	N/A
0.3125	N/A	N/A
0.3750	N/A	N/A
5 mm	N/A	N/A
6 mm	N/A	N/A
7 mm	N/A	N/A
8 mm	N/A	N/A
9 mm	N/A	N/A