


FEATURES

- **High-Quality Spider Design**
- **Handles the Most Demanding Applications**
- **Max Torque of 63,725 in-lb.**
- **Allows for Different Bore Diameters**
- **No Maintenance**
- **Requires Three Individual Part Numbers**
- **Easy Assembly**
- **Wide Variety of Sizes**

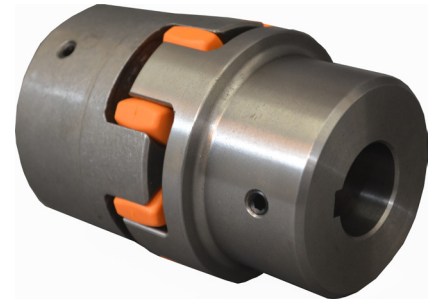


DESCRIPTION

ROTEX® couplings are designed to transmit torque between drive and driven components via curved jaw hubs and elastomeric elements commonly known as spiders. The combination between these components provides dampening and accommodation for misalignments. This product is available in a variety of metals, elastomers and mounting configurations to meet your specific needs.

Ordering Guideline: There are three individual part numbers you will need for a complete coupler (i.e., 2 Hubs and 1 Spider). Please choose the hub sizes that match the criteria for your application. In addition to the hubs, you will need to choose a spider, from the spider section.

Customization options are available; allow Anaheim Automation to specify the coupling designed for your application!

DIMENSIONS

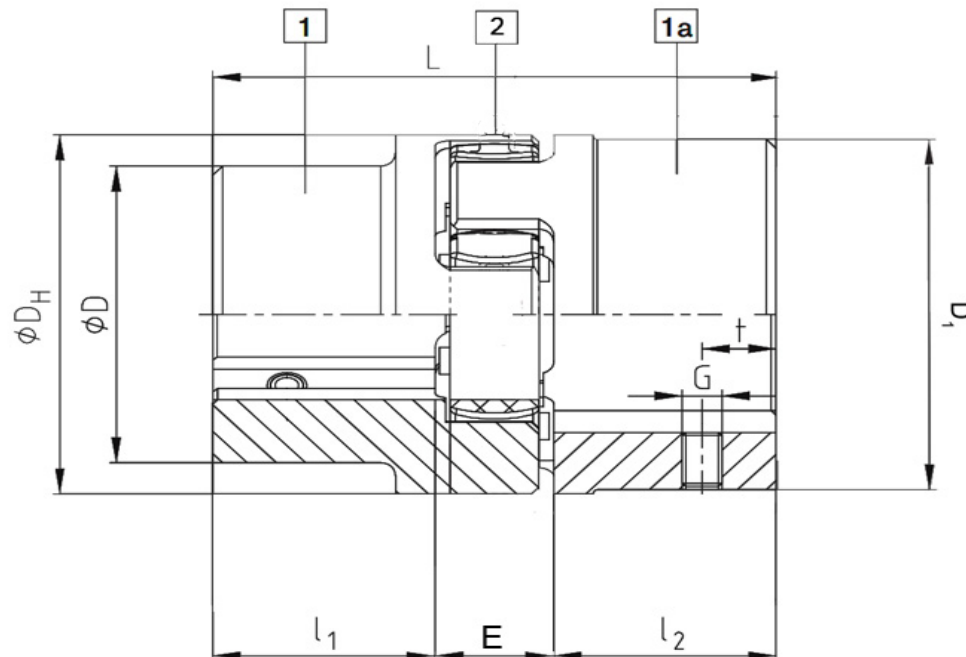

L011399

Inch Bores


Item	Bore Diameter (in)	Keyway (in)	Hub Design	Outside Diameter D _H , D, D ₁ (in)	Length Thru Bore "L ₁ , L ₂ " (in)	Coupling Length "L" (in)	Setscrew Torque (in-lb)	t (in)	E (in)	G	Material
KTR-BA020753073000	1 3/16	1/4	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753073100	1 1/4	1/4	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753073102	1 1/4	5/16	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753073300	1 5/16	5/16	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753073400	1 3/8	5/16	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753073401	1 3/8	3/8	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753073600	1 7/16	3/8	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753073800	1 1/2	3/8	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753073802	1 1/2	5/16	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753073900	1 9/16	3/8	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753074100	1 5/8	3/8	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753074200	1 11/16	3/8	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753074400	1 3/4	3/8	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753074402	1 3/4	7/16	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753074600	1 13/16	1/2	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753074700	1 7/8	1/2	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753074900	1 15/16	1/2	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753075000	2	1/2	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753075200	2 1/16	1/2	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753075300	2 1/8	1/2	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753075500	2 3/16	1/2	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753075700	2 1/4	1/2	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753076000	2 3/8	5/8	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753076600	2 5/8	5/8	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753077300	2 7/8	3/4	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753077400	2 15/16	3/4	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron
KTR-BA020753077600	3	3/4	1	6.3, 5.31, -	3.35	8.27	150	0.98	1.57	M10	Cast Iron

Metric Bores


Item	Bore Diameter (mm)	Keyway (mm)	Hub Design	Outside Diameter D _H , D, D ₁ (in)	Length Thru Bore "L ₁ L ₂ " (mm)	Coupling Length "L" (mm)	Setscrew Torque (Nm)	t (mm)	E (mm)	G	Material
KTR-BA020753003000	30	8	1	160, 135, -	85	210	17	25	40	M10	Cast Iron
KTR-BA020753003200	32	10	1	160, 135, -	85	210	17	25	40	M10	Cast Iron
KTR-BA020753003500	35	10	1	160, 135, -	85	210	17	25	40	M10	Cast Iron
KTR-BA020753003800	38	10	1	160, 135, -	85	210	17	25	40	M10	Cast Iron
KTR-BA020753004000	40	12	1	160, 135, -	85	210	17	25	40	M10	Cast Iron
KTR-BA020753004200	42	12	1	160, 135, -	85	210	17	25	40	M10	Cast Iron
KTR-BA020753004500	45	14	1	160, 135, -	85	210	17	25	40	M10	Cast Iron
KTR-BA020753004800	48	14	1	160, 135, -	85	210	17	25	40	M10	Cast Iron
KTR-BA020753005000	50	14	1	160, 135, -	85	210	17	25	40	M10	Cast Iron
KTR-BA020753005500	55	16	1	160, 135, -	85	210	17	25	40	M10	Cast Iron
KTR-BA020753006000	60	18	1	160, 135, -	85	210	17	25	40	M10	Cast Iron
KTR-BA020753006500	65	18	1	160, 135, -	85	210	17	25	40	M10	Cast Iron
KTR-BA020753007000	70	20	1	160, 135, -	85	210	17	25	40	M10	Cast Iron
KTR-BA020753007500	75	20	1	160, 135, -	85	210	17	25	40	M10	Cast Iron
KTR-BA020753008000	80	22	1	160, 135, -	85	210	17	25	40	M10	Cast Iron

Spiders

Item	Color	Material	Type/ Hardness	Max Speed (rpm)	Rated Torque (in-lb)	Max Torque (in-lb)	Temperature Rating for Continuous Use
KTR-020751000045	Orange	T-PUR	92 Shore-A,	4150	11,328.95	22,650	-50°C to +120°C
KTR-020751000042	Purple	T-PUR	95/98 Shore-A	4150	16,993.43	33,980	-50°C to +120°C
KTR-020751000020	Green	T-PUR	64 Shore-D	4150	21,241.78	42,480	-50°C to +120°C
KTR-020751000088	White	Polyamide	-	-	22,657.90	45,317	-20°C to +130°C
KTR-020751000084	Grey	Polyetherethertone	-	-	22,657.90	45,317	Up to +180°C

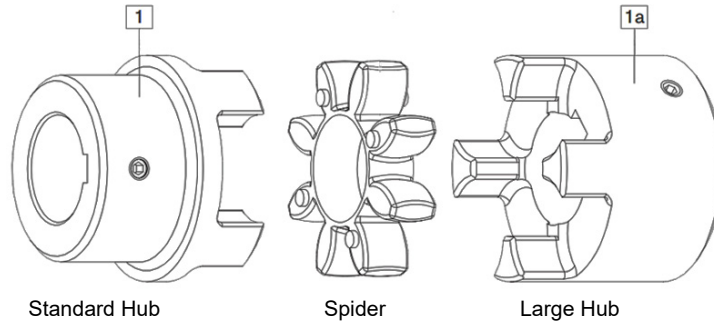


Axial Misalignment ΔKa

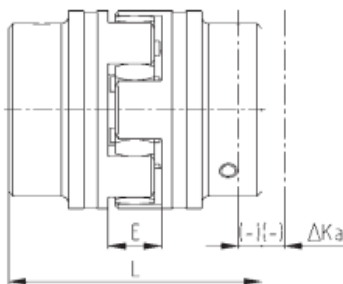


$$L_{max} = L + \Delta Ka$$

Parallel Misalignment ΔKr

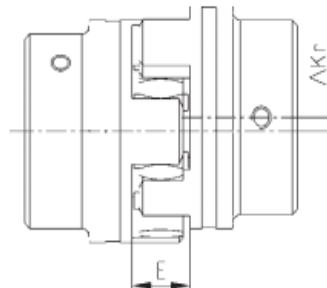

Angular Misalignment ΔKw [degrees]

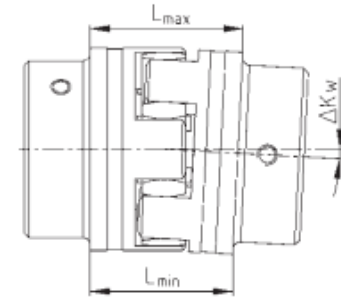

$$\Delta Kw [in] = L_{max} - L_{min}$$

ROTEX® Size	14	19	24	28	38	42	48	55	65	75	90
Max. Axial Misalignment ΔKa [in]	-0.02 +0.04	-0.02 +0.05	-0.02 +0.06	-0.03 +0.06	-0.03 +0.07	-0.04 +0.08	-0.04 +0.08	-0.04 +0.09	-0.04 +0.10	-0.06 +0.12	-0.06 +0.13
Max. Parallel Misalignment at n=1,800 rpm ΔKr [in]	0.006	0.007	0.008	0.009	0.010	0.011	0.013	0.014	0.015	0.017	0.018
Max. Angular Misalignment at n=1,800 rpm ΔKw [Degree]	1.1	1.0	0.8	0.9	0.9	1.0	1.1	1.1	1.1	1.1	1.2
ΔKw [in]	0.024	0.029	0.031	0.031	0.051	0.067	0.079	0.090	0.102	0.126	0.161

The above misalignment figures for ROTEX® couplings are standard values, taking into account the load of the coupling up to the rated torque T_{KN} and an operating speed $n = 1,800$ RPM along with an ambient temperature of $+180^{\circ}C$. For other operating parameters, please ask for KTR-Norm 20240 on misalignments for ROTEX®. The maximum angular and parallel misalignments must not be used concurrently. For example; 70% of the maximum parallel value allows 30% of the maximum angular value. Also, care should be taken to accurately maintain the distance dimension "E", allowing for axial clearance of the coupling while in operation. In case of an axial thrust, the dimension "L" must be taken as a minimum dimension in order to keep the spider free from pressure against the face. Detailed installation instructions are available at www.ktr.com.